METROPOLITAN
EQUIPMENT GROUP



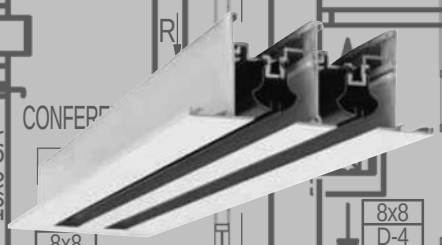



Stock Catalog

9015 Junction Drive, Suite 2, Annapolis Junction MD 20701
877.MEG.HVAC www.meghvac.com

TERMS & CONDITIONS OF SALE

1. ORDERS: Wholesale Only. All orders subject to acceptance by Metropolitan Equipment Group (MEG). Possession of this wholesale catalog does not constitute the right to purchase from MEG. Minimum order net is $25.00.

2. PAYMENT TERMS: Terms of payment are net 30 days from date of invoice.

3. COLLECTION FEES: Customers agree to pay all costs of collection, including, but not limited to, an attorney's fee equal to thirty percent (30%) of all sums due and outstanding, as well as court costs, if Customer fails or refuses to pay the amount due in accordance to the terms above. Additionally Customer will be subject to 1.5% interest per month until payment.

4. SALES TAX: No sales taxes are included in the prices listed in this catalog. Sales tax will be charged in accordance with appropriate jurisdiction.

5. FREIGHT: All shipments are F.O.B. our Beltsville warehouse, freight prepaid and added to invoice.

6. WARRANTIES: Standard manufacturer warranties to apply.

7. TITLE: Title to all materials shall remain the sellers' until the purchase price is paid in full.

8. CLAIMS: The responsibility of MEG ceases upon delivery of material in good order to the carrier. Any claims for damages, shortages, or losses in transit must be filed by the customer against the transportation company once the material is received. Claims of shortage will not be considered unless made within 30 days after receipts of goods.

9. RETURN POLICY:
- Material must be returned within 90 days of purchase from the warehouse.
- Return authorization and shipping ticket or copy of MEG invoice to be included with return.
- Returns will be subject to a 25% restocking fee.
- Only stock items will be accepted for return.
- If non-stock items are returned without authorization the customer will be responsible for the return freight. No credit will be issued.

TABLE OF CONTENTS

MAP 01

NAILOR AIR DISTRIBUTION
Perforated Supply Diffusers 02
Perforated Return Diffusers 03
Square Ceiling Supply Diffusers 04
Square, Round Ceiling Supply Diffusers 05
Plenum & Linear Slot Diffusers 06
Plenum Slot Diffusers Vertical Discharge 07
Plenum Slot Diffusers 08
Plaster Frames 08
Supply Grilles & Return Grilles 09
Eggcrate Return & Filter Grille 10
Dampers 11

NAILOR AIR TERMINAL UNITS
Single Duct VAV Boxes 12
Hot Water Coils 13

SOUND ATTENUATOR
Sound Attenuators 14

ACCESS DOORS
FlexmasterUSA Inspector Round Doors 15
Square Access Doors 15

FLEXIBLE DUCT & FITTINGS/TOOLS
FlexmasterUSA Flexible Duct 16
Clamps & Installation Tool 17
FlexmasterUSA Fittings 18

GRIPPLE HANGING PRODUCTS
Gripple Hangers 19

METROPOLITAN
EQUIPMENT GROUP

9015 Junction Drive, Suite 2
Annapolis Junction MD 20701
877.MEG.HVAC www.meghvac.com

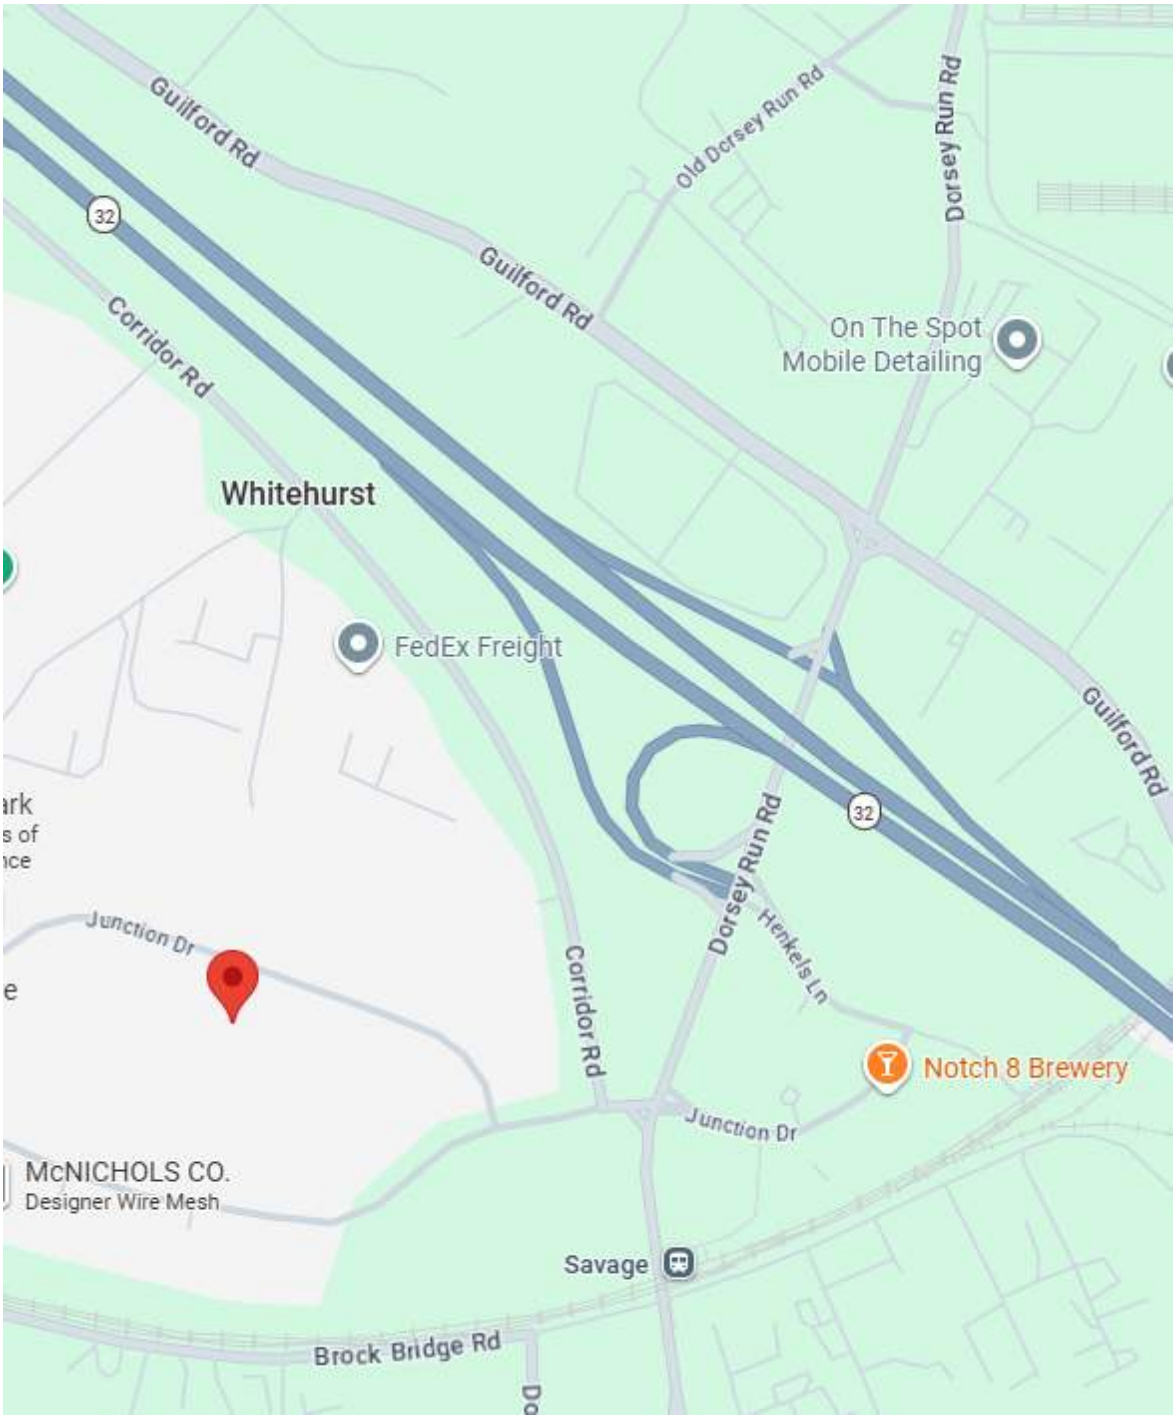

PERFORATED SUPPLY DIFFUSERS

Model 4320CB - Curve Blade - Lay-In

HOW TO ORDER

MODEL	NECK SIZE
PCDCB	06, 08, 10, 12

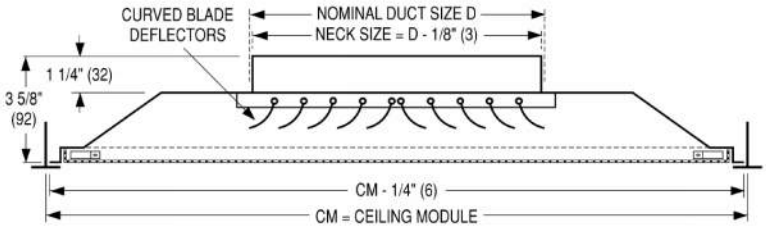

Product Notes:
- Adjustable pattern controllers
- Removable face
- Corrosion-resistant steel construction
- 24x24 Lay-In frame
- Finish is Appliance White baked enamel

- Pattern controller located in neck
- Available in Drop-Face

Optional Accessories:

- 4675 Butterfly Damper (p. 11)
- DFA Drywall Mounting Frame (p. 08) (For surface mount applications)
- 4250 Radial Sliding Damper (p. 11)
- 4275 (Non-Stk) Radial Opposed Blade Damper

Model 4320 & 4325 - Perforated Supply - Lay-In

HOW TO ORDER

MODEL	NECK SIZE
PCD	06, 08, 10, 12, 14, 16
PCD1212	06
PCDDF	06, 08, 10, 12

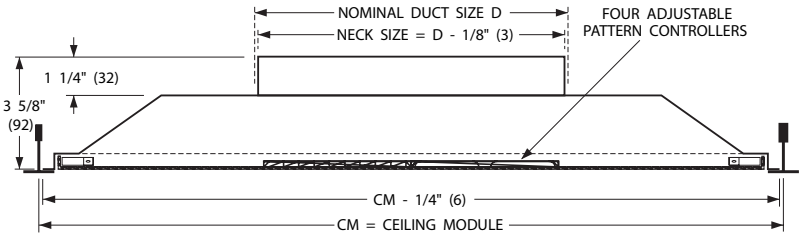

PCD pictured

Product Notes:
- Adjustable pattern controllers
- Removable face
- Corrosion-resistant steel construction
- 24x24 or 12x12 Lay-In frame
- Finish is Appliance White baked enamel

- Pattern controller located on inside of face
- Drop-Face - PCDDF (24x24)

Optional Accessories:

- 4675 Butterfly Damper (p. 11)
- DFA Drywall Mounting Frame (p. 08) (For surface mount applications)
- 4250 Radial Sliding Damper (p. 11)
- 4275 (Non-Stk) Radial Opposed Blade Damper

Dimensions are in inches (mm)

PERFORATED RETURN

Model 4360 & 4365 - Return Grille - Lay-In

HOW TO ORDER

MODEL	NECK SIZE
PRG	22 x 22″
PRGDF	
PRG	22 x 10″

Product Notes:
- Hinged removable face plate
- Corrosion-resistant steel construction
- 24x24 & 24x12 Lay-In frame
- Square Neck
- Finish is Appliance White baked enamel

- Drop-Face - PRGDF



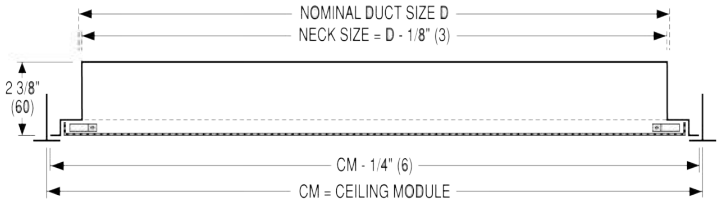

PRG pictured

Optional Accessories:

- OBD-S Opposed Blade Damper (p. 11)
- DFA Drywall Mounting Frame (p. 08) (For surface mount applications)

Model 4302 / 4302-DF - Return Panel - Lay-In

HOW TO ORDER

MODEL	CEILING MODULE SIZE
PRP	24 x 24″
PRPDF	24 x 24″

Product Notes:
- Corrosion-resistant steel construction
- 24x24 Lay-In frame
- Finish is Appliance White baked enamel



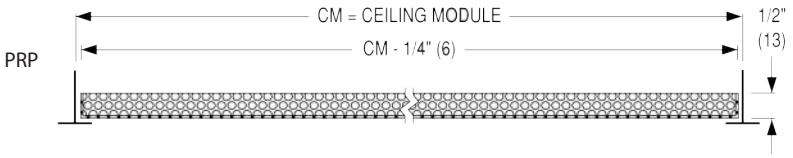

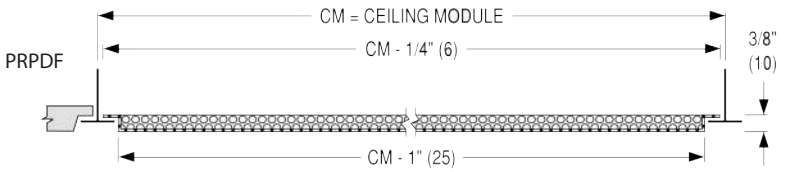

Dimensions are in inches (mm)

SQUARE CEILING SUPPLY DIFFUSERS

Model UNI2 - Architectural Plaque - Lay-In

HOW TO ORDER

MODEL	NECK SIZE
PLKCD2	06, 08, 10, 12, 15
PLKCD1212	06

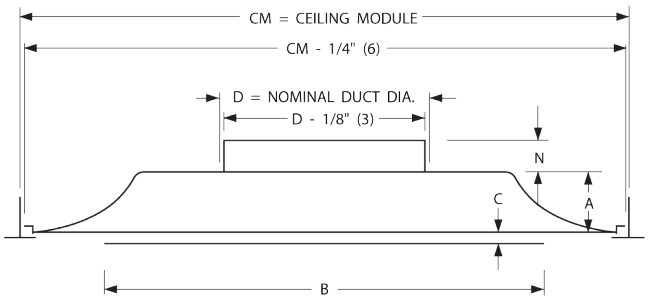

Product Notes:
- Architectural, flat panel
- Corrosion-resistant steel construction
- 24x24 Lay-In frame
- Round Neck
- Finish is Appliance White baked enamel

- Also Avail in 12x12 Lay-In Frame



Optional Accessories:
- 4675 Butterfly Damper (p. 11)
- DFA Drywall Mounting Frame (p. 08) (For surface mount applications)
- 4250 Radial Sliding Damper (p. 11)
- 4275 (Non-Stk) Radial Opposed Blade Damper

Model 6500L / 6500S - Lay-In & Surface Mount

HOW TO ORDER

MODEL	NECK SIZE
LCDL	06x06, 09x09, 12x12 15x15, 18x18
LCD	

Product Notes:
- Louvered face design
- High capacity with removable core
- Corrosion-resistant steel construction
- 24x24 Lay-In frame
- Finish is Appliance White baked enamel

LCDL pictured

LCDL

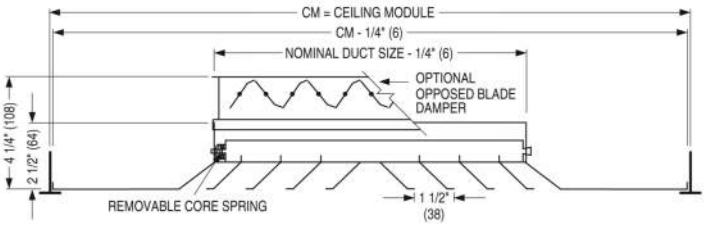

LCD

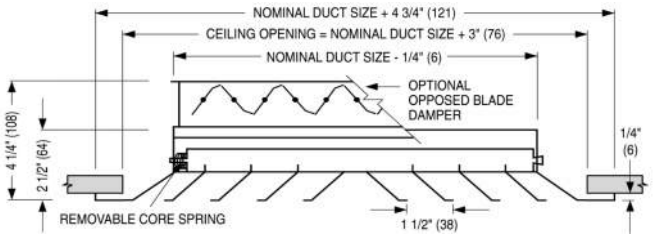

Optional Accessories:
- OBD-S Opposed Blade Damper (p. 11)
- DFA Drywall Mounting Frame (p. 08) (For surface mount applications)
- S2R Square to Round Transition (p. 24)
- 6500-CO (6x6, 9x9, 12x12) 2-Way Split, 2-Way Corner, 3-Way

Dimensions are in inches (mm)

SQUARE, ROUND CEILING SUPPLY DIFFUSERS

Model RNS3 - Stamped 3 Cone - Lay-In

HOW TO ORDER

MODEL	NECK SIZE
RNS	06, 08, 10, 12, 14

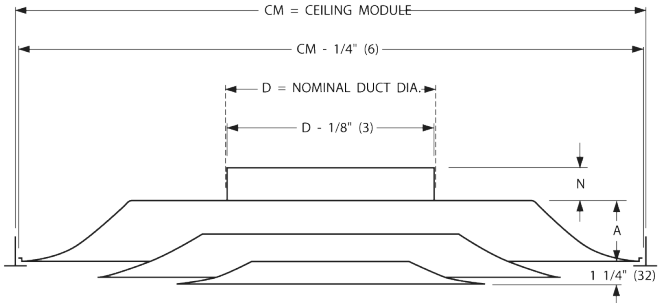

Product Notes:
- Louvered panel face with round neck
- Corrosion-resistant steel construction
- 24x24 Lay-In frame
- Finish is Appliance White baked enamel

Optional Accessories:
- 4675 Butterfly Damper (p. 11)
- DFA Drywall Mounting Frame (p. 08) (For surface mount applications)
- 4250 Radial Sliding Damper (p. 11)
- 4275 (Non-Stk) Radial Opposed Blade Damper

Model RNR & RUNI - Round Ceiling Diffuser - Surface Mount

HOW TO ORDER

MODEL	NECK SIZE
RCD	06, 08, 10, 12, 14
RPCD	06, 08, 10, 12

RCD

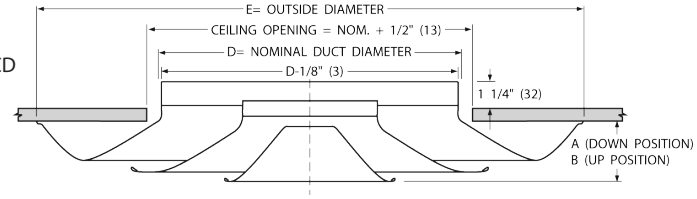

RPCD

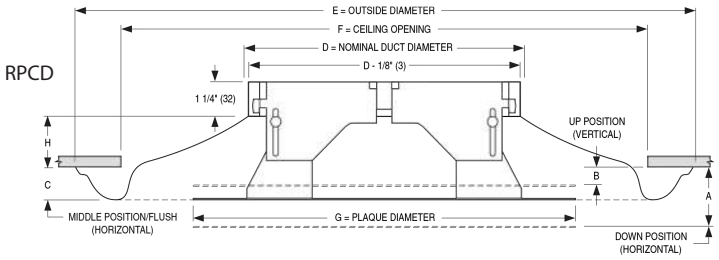

Product Notes:
- Two position adjustable cones
- Removable inner core assembly
- Corrosion-resistant steel construction
- Surface Mount
- Finish is Appliance White baked enamel

RCD

RPCD

Optional Accessories:
- 4675 Butterfly Damper (p. 11)
- 4250 Radial Sliding Damper (p.11)
- 4275 (Non-Stk) Radial Opposed Blade Damper

Dimensions are in inches (mm)

LINEAR SLOT DIFFUSERS

Model FLH10 & 15 - Architectural Linear Slot Diffuser

HOW TO ORDER

MODEL	NOMINAL LENGTH	NO. OF SLOTS	SLOT WIDTH	W / OW	C - BORDER WIDTH	H HEIGHT
FL	72	1	1 (25)	2-1/2 / 4-3/8	1-11/16	2-3/8
FL	72	1	1-1/2 (38)	3-1/2 / 5-3/8	1-15/16	3-5/8

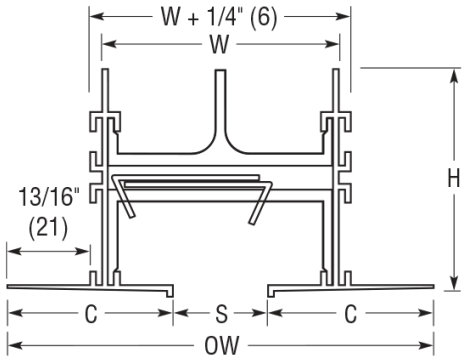



Product Notes:
- Heavy duty extruded aluminum frame and spacers
- Corrosion-resistant & adjustable horizontal throw pattern controllers
- Type CC Concealed frame for Drywall / Tape & Spackle
- 1" (25) or 1-1/2" (38) slot width
- Type C - Flat End Cap
- Mill Finish

Model 5000 - Linear Slot Diffuser

HOW TO ORDER

MODEL	NOMINAL LENGTH	NO. OF SLOTS	SLOT WIDTH	UNIT WIDTH (D)
LD	48 or 60	2 or 3	1	4 1/4 or 6
LD	48 or 60	2 or 3	3/4	3 3/4 or 5 1/4
LDEC	-	2 or 3	1 or 3/4	-
LDL	24 or 48	2	1 or 3/4	3 1/4 or 3 3/4

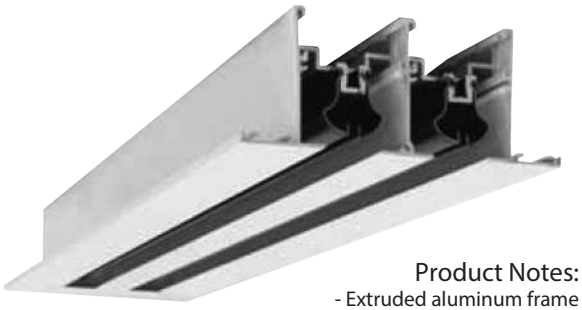

Product Notes:
- Extruded aluminum frame with corrosion-resistant steel pattern controllers
- AW Appliance White baked enamel with black pattern controllers

- LD Type C, 1 1/8" Flanged Frame with concealed mounting brackets
- OO Open Ends
- Optional Flanged End Cap (LDEC)

- LDL Type T, for Std 15/16" or 9/16" face lay-in T-Bar
- MM Mitered End Caps

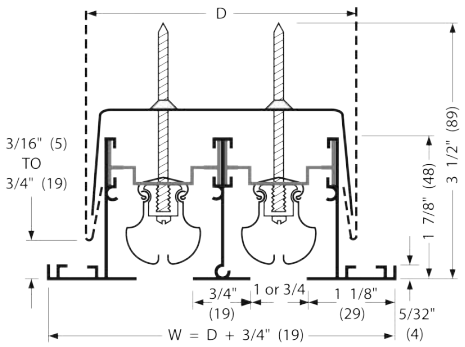

LD pictured

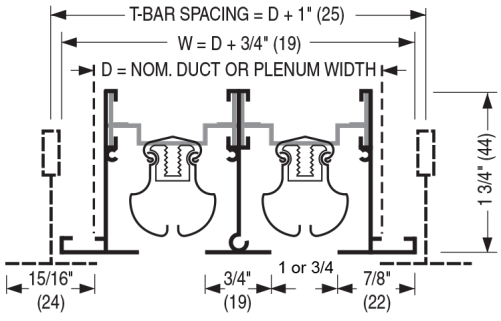

LDL pictured

Dimensions are in inches (mm)

PLENUM SLOT DIFFUSERS

Model 59NDR - Horizontal/Vertical Discharge w/ Down Blow

HOW TO ORDER

MODEL	NOMINAL LENGTH	NO. OF SLOTS	INLET SIZE	DB SLOT (D)
NSLOTDB	24	1	6 Round	08
NSLOTDB	36	1	8 Oval	12
NSLOTDB	48	1	8 Oval	15
NSLOTDB	60	1	8 Oval	18

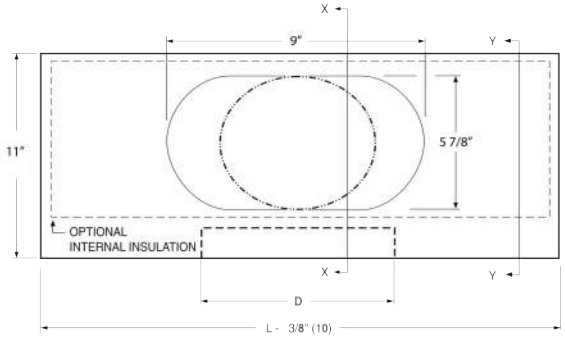



Product Notes:

- Adjustable Horizontal / Vertical Discharge
- Supply / Return
- Corrosion-resistant steel plenum; extruded aluminum pattern controllers
- BK Black pattern controllers and exposed edges
- Diamond Flow Sensor w/ extended collar and bead

- Optional Plaster Frame (PFNS) p. 08

Model 59BSR - Adjustable Vertical Discharge

HOW TO ORDER

MODEL	NOMINAL LENGTH	NO. OF SLOTS	INLET SIZE
NSLOT	48	1	8 Oval

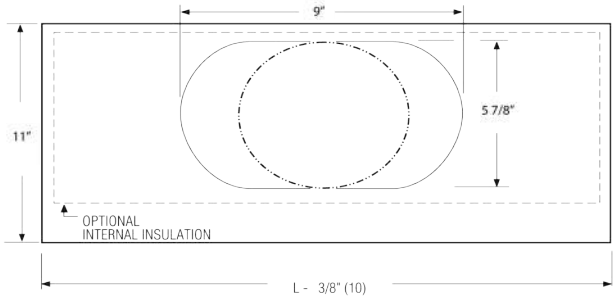



Product Notes:

- Adjustable Vertical Discharge
- Supply / Return
- Top Inlet Return
- Corrosion-resistant steel plenum; extruded aluminum pattern controllers
- BK Black pattern controllers and exposed edges
- Diamond Flow Sensor w/ extended collar and bead

- Optional Plaster Frame (PFNS) p. 08

Dimensions are in inches (mm)

PLENUM SLOT DIFFUSER & PLASTER FRAMES

Model 5710I & 5875I - Insulated Plenum Slot Diffuser

HOW TO ORDER

MODEL	NOMINAL LENGTH	NO. OF SLOTS	INLET SIZE	WIDTH (W)
PSDWBI	24	2	6 Round	4"
PSDWBI	48	2	10 Oval	4"
PSDITI	24	2	6 Round	3 1/2"
PSDITI	48	2	8 Round	3 1/2"

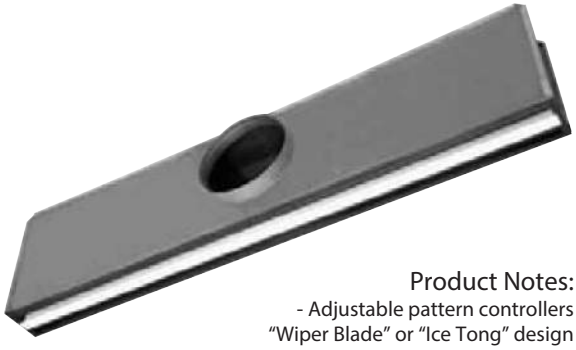

Product Notes:
- Adjustable pattern controllers "Wiper Blade" or "Ice Tong" design
- Corrosion-resistant steel plenum, pattern controllers and center tee

- Finish is AW Appliance White baked enamel on T-Bar and black pattern controllers
- Unit Height 11"

- 5710I Wipper Blade 1" (25) slot width
- 5875I Ice Tong 3/4" (19) slot width
-5875I 48" also avail with Center Notch

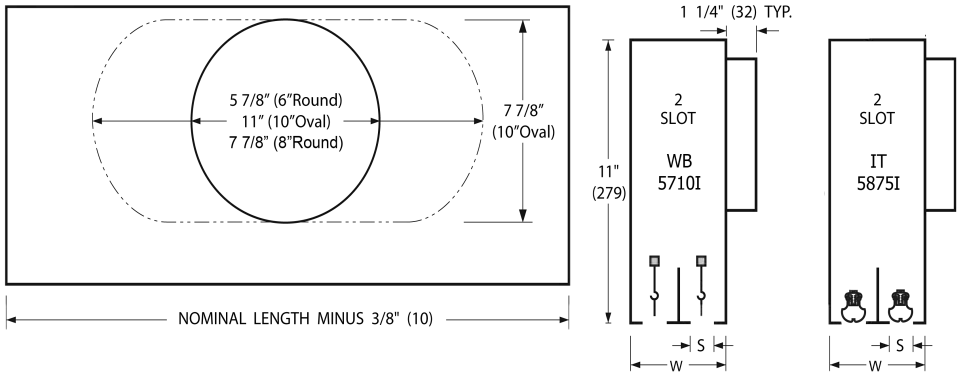

Model DFA & PF59NDR - Plaster Frame

HOW TO ORDER

MODEL	CEILING MODULE
PF	12 x 12, 24 x 24
PFNS	24, 36, 48, 60
PFPSD	24 or 48

Product Notes:
- Allows installation of lay-in diffuser, grille , 59NDR (BSR) or PDS in hard ceiling
- Aluminum construction
- Finish is Appliance White baked enamel finish

-PFPSD for use with 2 slot PSD; 3/4 or 1" slots



CEILING OPENING = CM + 1/4" (6)





TYPICAL INSTALLATION

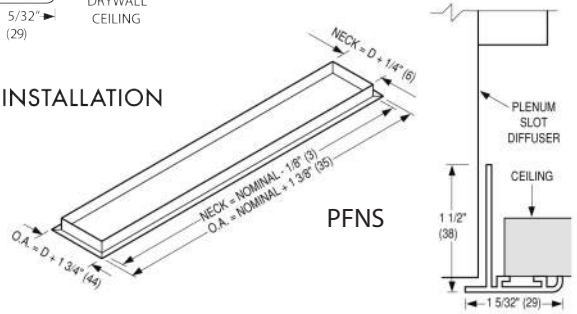

PFNS

SUPPLY/RETURN GRILLES

Model 61DV-0 - Supply Registers

HOW TO ORDER

MODEL	NECK SIZE
SR	see aval sizes below

Product Notes:
- Corrosion-resistant steel construction
- Double deflection with OBD
- Surface mount border
- Type A countersunk screw holes
- Finish is Appliance White baked enamel

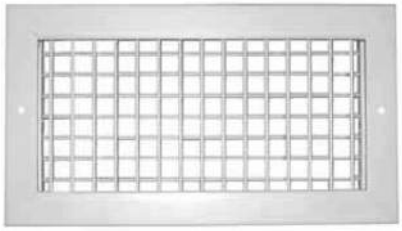

AVAILABLE SIZES

Height \ Width	06	08	10	12	14	16	18	20	24	30	36
04	X	X	X	X						X	
06	X	X	X	X	X	X	X	X	X		
08		X	X	X	X	X	X	X	X	X	X
10			X	X	X	X	X	X	X	X	X
12				X	X	X	X	X	X	X	X
14					X	X					
16											
18							X		X		
20								X			
24									X		

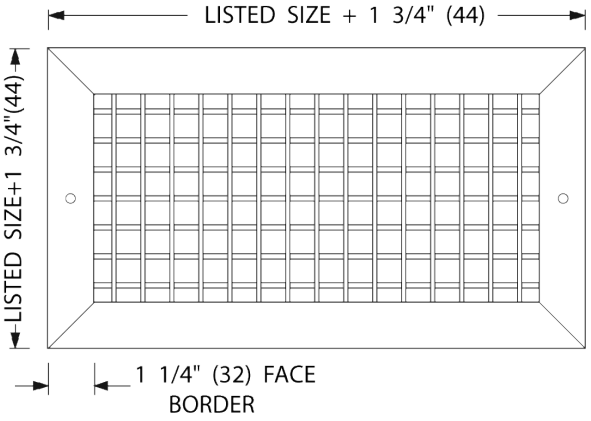

Model 6145H - Return Registers/Grilles

HOW TO ORDER

MODEL	NECK SIZE
RG	see aval sizes below

Product Notes:
- Corrosion-resistant steel construction
- Fixed 45 degree blades
- Surface mount border
- Type A countersunk screw holes
- Finish is Appliance White baked enamel
- N = No Screw Holes
-A = Aluminum

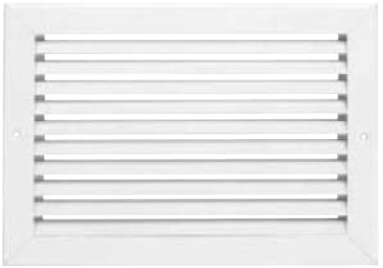

AVAILABLE SIZES

Height \ Width	06	08	10	12	14	16	18	20	22	24	30	36	46	48
04	X													
06	X	X	X	X			X			X				
08		X	X	X	X	X	X	X		X				
10			X	X	X	X	X	X	N	X				
12				X	X	X	X	X		X	X			
14					X	X	X			X				
16						X	X			X	X			
18							X			X		X		
20								X						
22									N				N	
24										X	X	X		X
30											X			X
36												X		
48														A

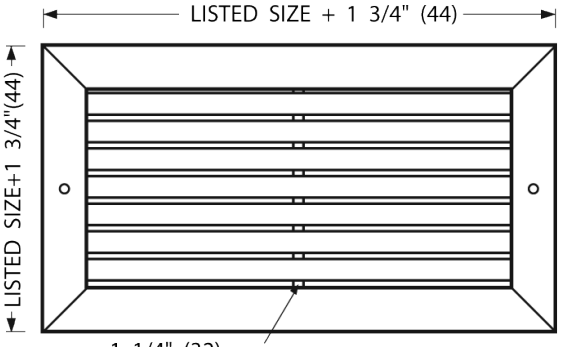

Dimensions are in inches (mm)

EGGCRATE & FILTER GRILLE

Model 61EC - Eggcrate Return Grille

HOW TO ORDER

MODEL	NOMINAL SIZE
RGEC	22 x 10, 22 x 22

Product Notes:

- Corrosion-resistant steel construction frame
- 1/2 x 1/2 x1/2 aluminum grid core
- Lay-In or Surface Mount (no screw holes)



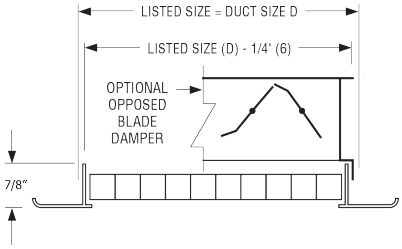

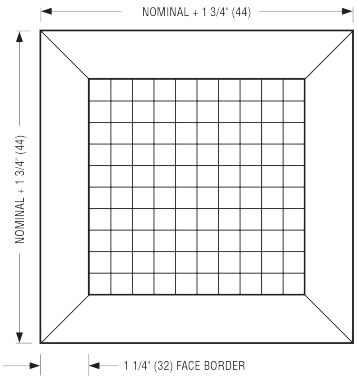

Dimensions are in inches (mm)

Model 61FB45 - Filter Grille

HOW TO ORDER

MODEL	NOMINAL SIZE
FG	20 x 20

Product Notes:

- Louvered Face, lay-in or surface mount Filter Grille
- Corrosion-resistant steel construction
- Provision for 1" filter (by others) is standard
- Core is hinged and secured by 1/4 turn latches
- Finish is Appliance White baked enamel

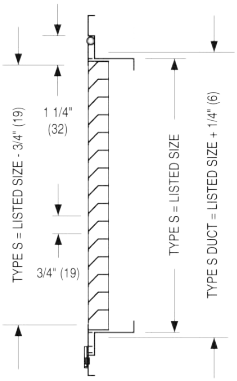

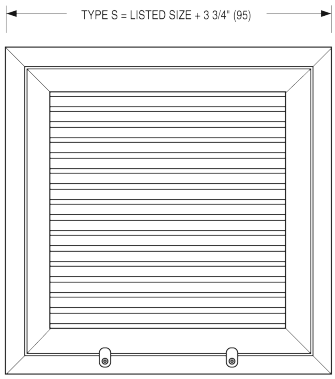

Dimensions are in inches (mm)

DAMPERS

Model 4675 & 4250 - Radial Dampers

HOW TO ORDER

MODEL	NOM. SIZE
BFD	06, 08, 10, 12, 14
SBD	06, 08, 10, 12, 14

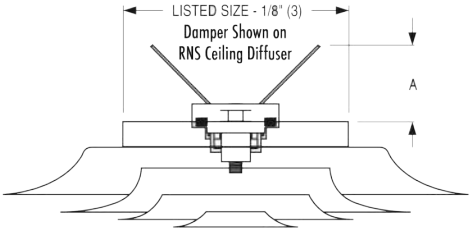

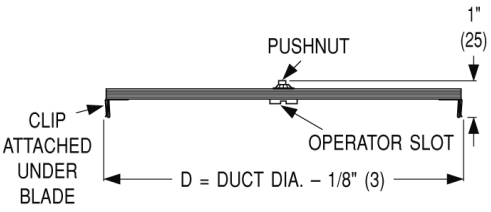

Product Notes:

- Damper for volume balancing (BFD)
- Corrosion-resistant steel construction
- Economical damper for round neck diffusers
- Adjustable fricton points hold the blades at the required setting
- Not recommended for use with flexible duct

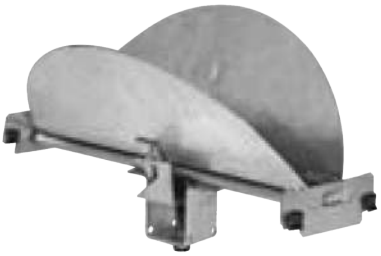

Product Notes:

- Damper for volume balancing (SBD)
- Corrosion-resistant steel construction
- Radial Sliding Blade damper for round neck diffusers
- Gang operated blades slide at right angles to duct
- Works effectively in flexible duct applications



Model OBD-S - Opposed Blade Damper

HOW TO ORDER

MODEL	WW x HH
OBD	see aval sizes below

Product Notes:

- Steel square OBD for neck mounting
- Corrosion-resistant steel construction
- Type SL Screwdriver slot face operator
- Finish is MI Mill

Width

Height	06	08	09	10	12	14	15	16	18	20	22	24
06	X	X		X	X							X
08		X		X	X	X		X		X		X
09			X									
10				X	X	X						
12					X	X		X	X	X		X
14						X						
15							X					
16								X				X
18									X			X
22											X	
24												X

Dimensions are in inches (mm)

VAV BOXES

Model D3001 - Single Duct Terminal Unit without Controls

HOW TO ORDER

MODEL	UNIT SIZE
VAV	see available sizes below

Product Notes:

- Variable or Constant Volume
- Corrosion-resistant steel casing and damper
- NB Aluminum multi-point averaging flow sensor
- OR Right hand controls location (Clockwise to close)
  (For Left hand location: flip box upside down)
- FG2 3/4" (19) thick Fiber-Free liner (Hospital Grade)
- Discharge has a slip and drive cleat duct connection
- DDC Controls by others
- FN Controls Enclosure
- FP Access Door

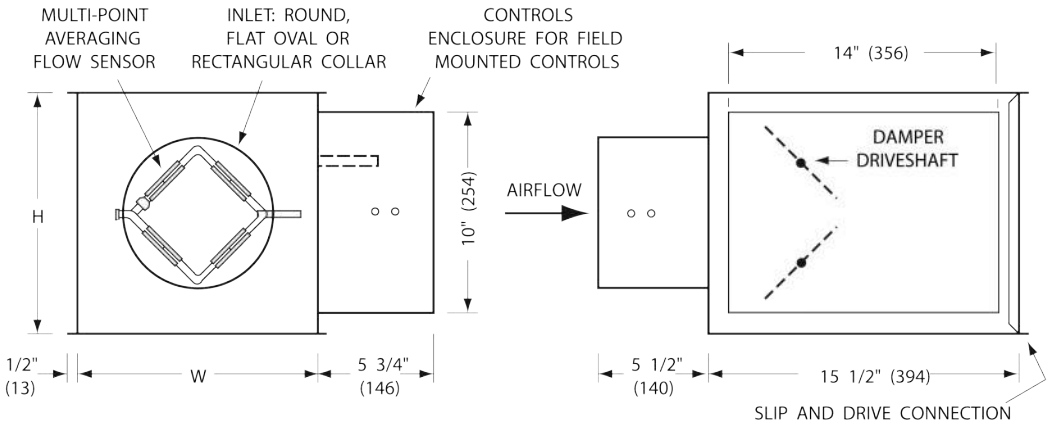

DIMENSIONAL DATA

UNIT SIZE	CFM RANGE	W	H	INLET SIZE
04	0-180	10	10	3 7/8 ROUND
05	0-325	10	10	4 7/8 ROUND
06	0-450	10	10	5 7/8 ROUND
07	0-650	12	12 1/2	6 7/8 ROUND
08	0-900	12	12 1/2	7 7/8 ROUND
09	0-1150	14	12 1/2	8 7/8 ROUND
10	0-1500	14	12 1/2	9 7/8 ROUND
12	0-2050	18	12 1/2	12 15/16 x 9 13/16 OVAL
14	0-2550	24	12 1/2	16 1/16 x 9 13/16 OVAL
16	0-3040	28	12 1/2	19 3/16 x 9 13/16 OVAL
24	0-6800	38	18	23 7/8 x 15 7/8 RECT.

Optional Accessories:

- V30HWC Hot Water Coils p. 13
- SRU with Hospital Grade Liner p. 14

Dimensions are in inches (mm)

HOT WATER COILS

Model V30HWC - Hot Water Coils - 1 or 2 Rows

HOW TO ORDER

MODEL	UNIT SIZE (US RR)
COIL	see avail unit sizes and rows of coils below

Product Notes:

- 1 or 2 Rows
- Slip and Drive connection
- Tubes are 1/2" (13) O.D. copper
- Fins are rippled aluminum, 10 fins per inch
- Connections: 1/2" (13) or 7/8" (22) O.D. male solder, depending on size and number of coils
- Coils are pressure tested to 360 psi (2481 kPa)
- ARI Certified

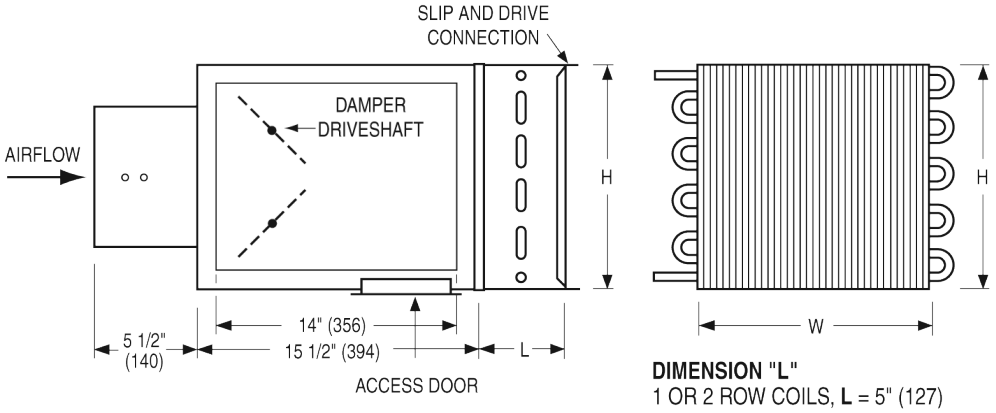

DIMENSION "L"
1 OR 2 ROW COILS, **L** = 5" (127)

DIMENSIONAL DATA

UNIT SIZE	CFM RANGE	W	H	COIL CONNECTIONS 1 ROW	2 ROW
05	0-325	10	10	1/2	7/8
06	0-450	10	10	1/2	7/8
07	0-650	12	12 1/2	1/2	7/8
08	0-900	12	12 1/2	1/2	7/8
10	0-1500	14	12 1/2	1/2	7/8
12	0-2050	18	12 1/2	1/2	7/8
14	0-2550	24	12 1/2	1/2	7/8
16	0-3040	28	12 1/2	7/8	7/8
24	0-6800	38	18	7/8	7/8

Dimensions are in inches (mm)

SOUND ATTENUATORS

Model 3HP-MD-1 - Hospital/Clean Room Attenuator

HOW TO ORDER

MODEL	UNIT SIZE (WW x HH x 36" L)
SRU	12x12, 15x12, 18x12, 24x12 24x18, 30x12, 36x18

Product Notes:

- Standard Pressure Drop unit ideally suited for system velocities at or near 1,000 FPM
- 22 ga Galvanized Steel Casting
- 22 ga Perforated Galvanized Baffles
- Diffusion angle to improve pressure drop
- Bellmouth entrance to help minimize turbulence
- Acoustic fill encapsulated in polyethylene to eliminate erosion and absorption of gases
- Acoustic stand-off between the perforated baffle and the acoustic fill to enhance performance
- Maximum Differential Pressure - 8 In. wc. as tested in accordance with UL 181, Section 17
- Meets NFPA 90A, UL 723, and ASTM E84

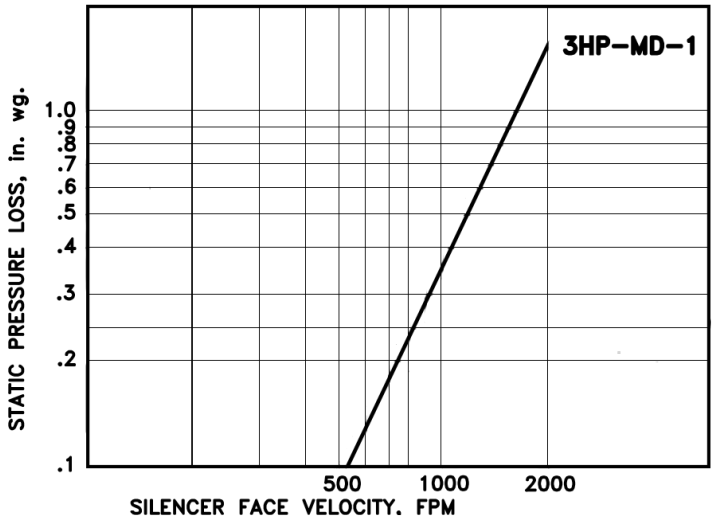

SOUND DATA

Model	Flow	Velocity fpm	Dynamic Insertion Loss (dB) Octave Band/Center Frequency (Hz) 1 63	2 125	3 250	4 500	5 1K	6 2K	7 4K	8 8K
3HP-MD-1	Reverse Flow	-2000	4	10	15	19	24	27	32	16
		-1000	5	9	16	21	25	28	32	15
		0	7	9	15	21	24	28	31	14
	Forward Flow	1000	6	8	14	18	23	27	31	15
		2000	5	8	12	15	21	26	31	14

Dimensions are in inches (mm)

ACCESS DOORS

Model SDSM - Inspector Round Access Door

HOW TO ORDER

MODEL	CEILING MODULE
INSPEC	08, 10, 12, 18, 24

Product Notes:
- Low Leakage
- Quick installation
- Safe Entry and Exit
- Material is Heavy Galvanized Steel, rolled and double hemmed
- Spin Door

"THE INSPECTOR SERIES" T.M.
SPIN DOOR
Patent Pending

OPERATING PRESSURE	LEAKAGE RATE
6 w.g.	Less than .10 CFM
10 w.g.	Less than .25 CFM
20 w.g.	Less than .50 CFM

Model Square Access Door

HOW TO ORDER

MODEL	ACTUAL DOOR SIZE
AD	06 x 06, 08 x 08, 10 x 10 12 x 12, 14 x 14, 16 x 16
ADC	06 x 06, 08 x 08, 10 x 10 12 x 12, 14 x 14, 16 x 16 18 x 18, 20 x 20, 24 x 24

Product Notes:
- Die-formed 24 ga. galvanized steel flanged frame for strength (1)
- Die-formed double skin 24 ga. galvanized door panel for extra strength (2)
- 1" insulation (3)
- Notched knock-over tabs (4)
- Plated steel camlock fasteners (5)
- Positive seal polyethylene gasket (6)
- Continuous piano-type hinge (8)

- AD Hinged w/ Cam Latch (Pictured)
- ADC No Hinge w/ Cam Latches

AD

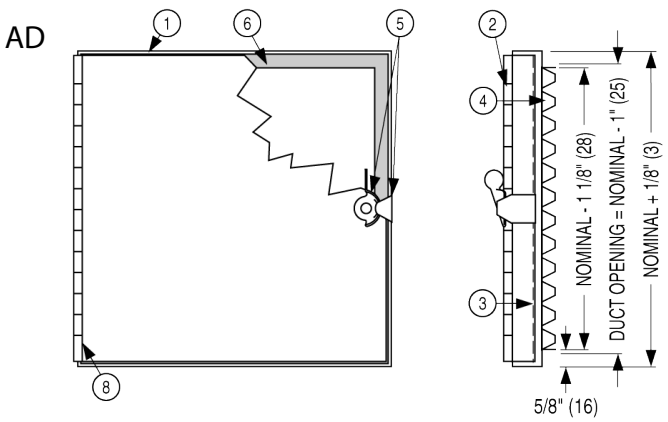

Dimensions are in inches (mm)

INSULATED FLEX DUCT

Model 3M - High Pressure - R6.0

HOW TO ORDER

MODEL	DUCT DIA
FLEX3M	06, 08, 10, 12, 14,16

Product Notes:
- Rated Velocity 5500 F.P.M.
- Vapor Barrier .05 Perm A.S.T.M.
- Core - Trilaminate of Alum Foil, Fiberglass and Alum Polyester
- Pressure Rate: 20" w.g. positive, 10" w.g. negative & 5" w.g. negative on 14"
- UL 181 Class, Flame/Smoke 25/50
- Operating Temperature -20 to 250 degrees F

Metalized Vapor Barrier shown

Model 5M & 5B - Low Pressure - R6.0

HOW TO ORDER

MODEL	DUCT DIA
FLEX5M	06, 08, 10, 12, 14,16
FLEX5B	06, 08, 10, 12, 14,16

Product Notes:
- Rated Velocity 5500 F.P.M.
- Vapor Barrier M: (.05) Perm A.S.T.M.
- Vapor Barrier B: (.10) Perm A.S.T.M.
- Core - Trilaminate of Alum Foil, Fiberglass and Alum Polyester
- Pressure Rate: 10" w.g. positive, 10" w.g. negative & 5" w.g. negative on 14"
- UL 181 Class, Flame/Smoke 25/50
- Operating Temperature -20 to 250 degrees F
- M = Reinforced Metalized Vapor Barrier
- B = Black Poly Vapor Barrier

Poly Vapor Barrier shown

Model 1M & 1B - Acoustical - R6.0

HOW TO ORDER

MODEL	DUCT DIA
FLEX1M	06, 08, 10, 12, 14, 16
FLEX1B	06, 08, 10, 12, 14

Product Notes:
- Rated Velocity 5500 F.P.M.
- Vapor Barrier M: (.05) Perm A.S.T.M.
- Vapor Barrier B: (.10) Perm A.S.T.M.
- Core - Polyethylene fabric, acoustically transparent PE film
- Pressure Rate: 10" w.g. positive and 5" w.g. negative
- UL 181 Class, Flame/Smoke 25/50
- Operating Temperature -20 to 250 degrees F
- M = Reinforced Metalized Vapor Barrier
- B = Black Poly Vapor Barrier

Metalized Vapor Barrier shown

Model 6M & 6B Acoustical - R6.0

HOW TO ORDER

MODEL	DUCT DIA
FLEX6M	06, 08, 10, 12, 14
FLEX6B	06, 08, 10, 12

Product Notes:
-Rated Velocity 5500 F.P.M
- Vapor Barrier M: (.05) Perm A.S.T.M.
- Vapor Barrier B: (.10) Perm A.S.T.M.
- Core Spunbond Nylon Fabric
- Pressure Rate: 6" w.g. positive and 5" w.g. negative
- UL 181 Class Flame/Smoke 25/50
-Operating Temperature -20 to 250 degrees F.
- M = Reinforced Metalized Vapor Barrier
- B = Black Poly Vapor Barrier

Metalized Vapor Barrier shown

CLAMP & INSTALLATION TOOL

Model Clamp - Nylon Clamp for Flex Duct

HOW TO ORDER

MODEL	SIZE
STRAP	36, 48
STRAPSS	51

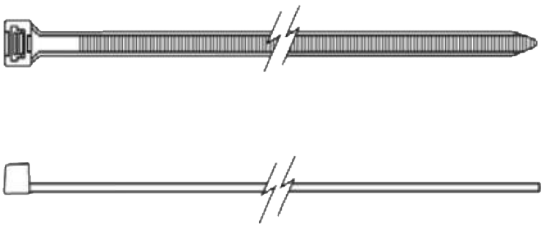

Product Notes:

- STRAP - Average loop tensile strength 175 lbs
- 6/6 Natural Nylon
- U.L. 94V-2
- Temperature Range -40 to 185 degrees F
- ATB less than 5 sec. per ASTM D635
- 36" Max Dia. formed 11" - 50/pk
- 48" Max Dia. formed 14" - 50/pk (for larger diameter join two or more

- STRAPSS - Stainless Steel Quick Release
- Clamp Dia 1 3/4" to 16 1/4"

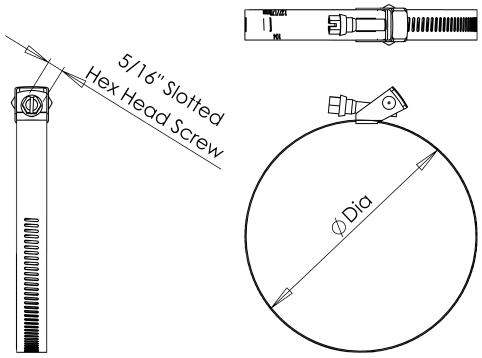

Model A-300 - Tension Tool

HOW TO ORDER

MODEL
STRAPTOOL

Product Notes:

- A-300 Heavy Duty Tension Tool
- For use with nonmetallic clamps
- 120 lb. to 175lb. duct straps
- Manual Tension Control
- Neatly Cuts off Strap
- Metal Construction

SHEET METAL FITTINGS

Model - Spin Collar with Damper

HOW TO ORDER

MODEL	DUCT DIA
FLD	06, 08, 10, 12, 14

Product Notes:
- Spin Collar

- Locking Damper with 2" Build Out

- 26 Gauge G-90 Galvanized, Dimensions 1/8" Tolerance

Model - Air Tite Flanged with Damper

HOW TO ORDER

MODEL	DUCT DIA
ATD	06, 08, 10, 12, 14

Product Notes:
- Flange to have Adhesive Gasket

- ATD - Locking Damper (pictured)
- ATDT - Locking Damper with 2" Build Out

- 26 Gauge G-90 Galvanized, Dimensions 1/8" Tolerance

Model - Side Take Off with Damper

HOW TO ORDER

MODEL	DUCT DIA
STODT	06, 08, 10, 12, 14

Product Notes:
- Flange to have Adhesive Gasket

- STOD - Locking Damper
- STODT - Locking Damper with 2" Build Out (pictured)

- 26 Gauge G-90 Galvanized, Dimensions 1/8" Tolerance
- 4" w.g. Construction

Conical Reducer

HOW TO ORDER

MODEL	DUCT (DIA 1 DIA 2)
SLCR	06-04, 08-06, 10-08 12-10, 14-12

Product Notes:
- Corrosion-resistant Steel - 26 ga

Square to Round

HOW TO ORDER

MODEL	MODULE SIZE
S2R	06x06-06R, 09x09-08R, 12x12-08R 12x12-10R, 12x12-12R, 15x15-12R 15x15-14R, 18x18-06R, 18x18-08R 18x18-10R, 18x18-12R

Product Notes:
- Transition with 3" Tall Box
- Corrosion-resistant Steel - 26 ga

Dimensions are in inches (mm)

GRIPPLE HANGERS

Model HF & XP - Loop, Hook, Stud, Eye Hangers

HOW TO ORDER

MODEL	MODEL
see model codes below	

Product Notes:
Provides lighter, easier and faster to threaded rod for hanging mechanical and electrical and HVAC equipment. Ready to use; requires no additional preparation time. Includes cable with loop, stud, hook or 90 degree Eyelet end fixing; grip secures free of cable and allows height adjustment of hanging object.

Loop: For wrap-around anchoring on bar joists or other roof structures.
Hook: For quick and easy anchoring on beams and purlin clips or any clip bracket with 6mm hole.
Stud: For anchoring into concrete or metal. Includes 1/4 or 3/8 drop-in expansion anchor.
Eyelet: For anchoring into concrete, ceiling or decking.

Weight Rating: 0-100 lbs - No. 2 / 101-200 lbs. - No. 3

New Gripple Express (XP2 No.2) the fastest locking device solution for fast suspension with a clever keyless release mechanism.

XP2

Loop Hanger

Hook Hanger

Stud Hanger

90 Eyelet Hanger

MEG Model	Weight (lbs)	Length	End Fixing
LH0210	100	10'	Loop
LH0310	200	10'	Loop
SH1410	100	10'	1/4" Stud
SH3815	200	15'	3/8" Stud
EH0210	100	10'	90 Degree Eye
HH0215	100	15'	Hook
GRIPCUT	Cable and Wire Cutter		
GRIPKEY	Easy Grip Release Key		
GRIPCORN	Corner Saddle for rectangular duct work		
GRIPTRAP	No. 3 Trapeze Fastener		